

CCL Series

Monobloc PT100 with connector

Ref : 2160

Rev: A



DESCRIPTION


This platinum probe model has excellent precision and is ideal for temperature measurements in solid, liquid, and gaseous environments. This version ends directly with an Amphenol or Lemo connector. To increase responsiveness, we can also offer tube end necking.

MESUREX is a sensor manufacturer. We can adapt most sensors to your needs. Please [contact us](#).

TECHNICAL CHARACTERISTICS

Probe	PT100 ceramic
Temperature range	-50°C to +400°C
Norm	Class A, class B or 1 / 3DIN type probe according to standard NF EN 60781
Connection	2-, 3- or 4-wire
Connector	Lemo or M12 type cylindrical connector
Diameter and length	on request
Options	tube end necking, sealed passage, sliding connection, extension with cable on request, other options please contact us

DIMENSIONS

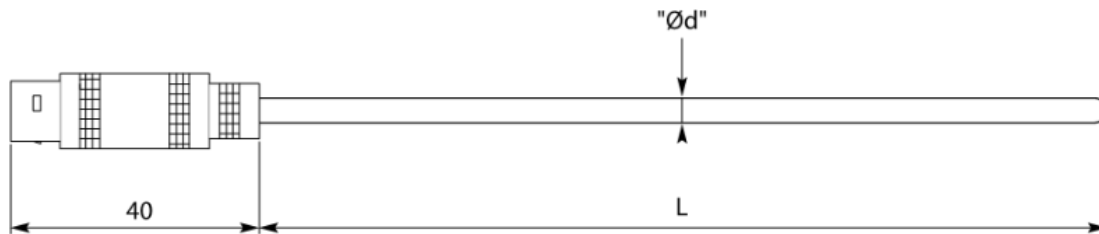

L: length on request

Ød: diameter on request

40: length of the connector (Lemo standard)

REFERENCE

CC	L / A	3	100
Jacketed PT100 probe	Lemo or Amphenol connector (number and type of pins according to PT100)	Diameter	Length

CONTACT

MESUREX

13 Rue des Corroyés

78730 Saint Arnoult en Yvelines (France)

Tel : +33 (0) 1 30 41 23 62

Mail : mesurex@mesurex.fr

Web : www.mesurex.fr