


TEMPERATURE SENSOR

ULTRA-SENSITIVE SOFT SURFACE

DS2047X2F1M

Ref : FP2700

Rev : A

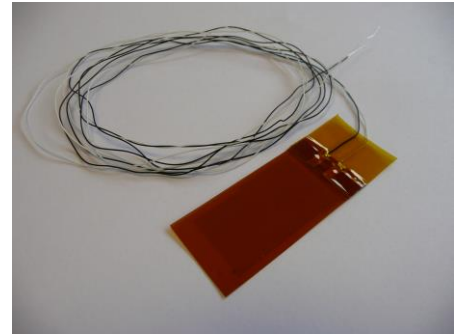

DESCRIPTION


Flexible and ultra-thin PT100 type platinum probe, 2-wire mounting with 22/24/26/28 gauge, unshielded. Ideal for use on rounded or flat surfaces (piping, between layers...).

MESUREX is a sensor manufacturer. We can adapt most sensors to your needs. Please [contact us](#).

TECHNICAL CHARACTERISTICS

Probe Type	PT100 (Class A)
Measuring range	-70°C to 200°C
Output cable	AWG28 length and diameter on request
Exit	2, 3, or 4-Wire on demand
Response time	0.1 s

DIMENSIONS

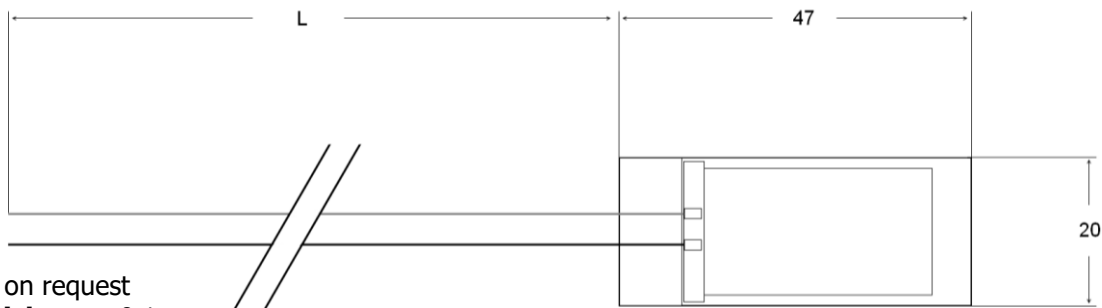

L: length on request
Probe thickness: 0.1 mm
Wire thickness: 0.3/0.5mm

OPTIONS

- Adhesive surface
- Conductor diameter
- Cable length
- Output connector

CONTACT

MESUREX

13 Rue des Corroyés

78730 Saint Arnoult en Yvelines (France)

Tel: +33 (0) 1 30 41 23 62

Fax: +33 (0) 1 30 41 23 80

Mail: mesurex@mesurex.fr