


CRR Series

Thermocouple CRR2K10M8

Ref : 2805

Rev : A

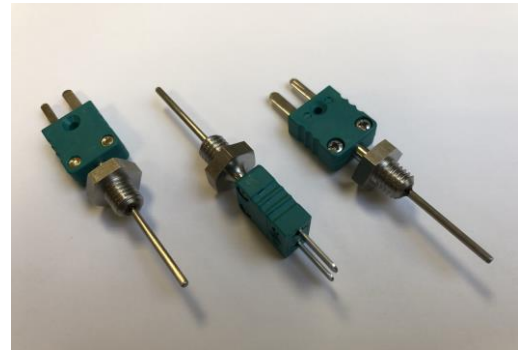

DESCRIPTION

Thermocouple type K, J, T, N etc, with integrated M8x125 stainless steel connection. Jacket diameter 2 mm length under net 10 mm, hot weld insulated from the ground, integrated miniature male connector (choice between K, J, T, N etc)

This robust, compact, and inexpensive thermocouple model is perfect for temperature measurements up to 250°C (or more depending on the versions and assemblies) in solid, liquid or gaseous environments. It is commonly used to insert pipelines, hoses... Good pressure holding.


MESUREX is a sensor manufacturer. We can adapt most sensor to your needs. Please [contact us](#).

TECHNICAL CHARACTERISTICS

Type of thermocouples	K,J,T,N (other on request)
Precision	Class 1, according to NF EN 60584-1 standard
Color coding	According to NF EN 60584-3 standard
Jacketed dimensions	Diameter 2 mm
Mechanical connection	M8x125 others consult us (stainless steel)
Temperature use	200/250°C (other on request)
Connection	Miniature compensated connector (other on request)

Example: CRR2K10M8

- Type K
- Diameter 2 mm
- Length 10 mm under net
- M8x125 stainless steel connection
- Miniature Type K male connector

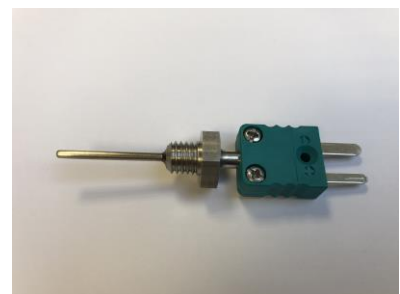

CONTACT

MESUREX

13 Rue des Corroyés

78730 Saint Arnoult en Yvelines (France)

Tel : +33 (0) 1 30 41 23 62

Fax : +33 (0) 1 30 41 23 80

Mail : mesurex@mesurex.fr